


BSL, BSLM series

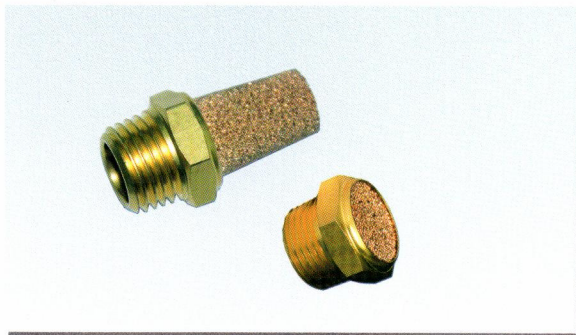


Specification

Model	BSLM5	BSL01	BSL02	BSL03	BSL04	BSLMM5	BSLM0	BSLM02	BSLM03	BSLM04
Thread connection	M5 × 0.8	1/8"	1/4"	3/8"	1/2"	M5 × 0.8	1/8"	1/4"	3/8"	1/2"
Operating pressure range	0~9kgf/cm ² (0~0.9MPa)									
Negative pressure	-750mmHg(10Torr)									
Proof pressure	1.5MPa									
Ambient and fluid temperature	0~60℃									



Dimensions

BSL series



Model\Item	R	A	B	H
BSLM5	M5 × 0.8	3.5	19.5	8
BSL01	1/8"	6	24	12
BSL02	1/4"	8	30	15
BSL03	3/8"	9	38.5	19
BSL04	1/2"	12	47.5	22

BSLM series



Model\Item	R	A	B	H
BSLMM5	M5 × 0.8	3.5	9.5	8
BSLM01	1/8"	6	11.2	12
BSLM02	1/4"	8	13.7	15
BSLM03	3/8"	9	15.7	19
BSLM04	1/2"	12	20.4	22

Product feature

1. The silencer body is made of copper and with high silencing performance.
2. The installation of the silencer is convenient and fast and the thread connection portion is safe and durable.


Ordering code

BSL-01

Silencer type	Thread connection
BSL: Universal silencer	M5: M5 × 0.8
BSLM: Mini Silencer	01: 1/8"
	02: 1/4"
	03: 3/8"
	04: 1/2"

Inner structure

Model: BSL



No.	Item	Material
1	Body	HPb59-1
2	Sound absorbing cover	Copper sintered particle